



## JNR FRESNEL 300AZ-W

■ JNR-8143B

JNR FRESNEL 300AZ-W adopts 300W COB LED(available for warm white) which features high brightness and stability. It is made of a new type of high temperature strength of cast aluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And JNR FRESNEL 300AZ-W is applicable for large-scale live performances, theater, studio, nightclubs and discos.


### Specification

- Input Voltage: AC90-260V 50/60Hz
- LED Quantities: 300W COB LED(available for warm white)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 2/5 DMX channels USITT DMX-512
- Power Consumption: 390W
- Dimensions: 580(D)\*320(W)\*320(H)mm
- Packing Dimensions: 600(D)\*480(W)\*480(H)mm
- Net Weight: 9.5kg
- Gross Weight: 11.5kg


## Detail

- 300W COB LED(available for warm white), 50,000 hours
- Color Rendering Index(CRI): Ra ≥ 92
- High efficiency fresnel lens
- Flat and even spot image with soft edge
- Automatic zoom system from 15°-50°
- Housing made by rugged, die cast aluminum alloy
- Thermally insulated rear handle
- Thermally insulated knobs and single aluminum handle for installing
- Barn door included
- Color frame as optional
- 0-100% Smooth and precise linear dimmer
- 25T/sec high speed shutter/strobe effect with variable speed
- Preset variable/random strobe and dimming pulse effect
- DMX512, master-slave, and sound control or auto operation
- 2/5 DMX channels USITT DMX-512
- 4-Button LCD display
- Powercon connector IN/OUT
- Power switch available with fuse
- 3-Pin and 5-pin XLR connectors IN/OUT
- Low noise fan integrated with copper liquid cooling system
- -35-45°C Max ambient temperature

- IP20
- 1\* Safety attachment point



Light Output (FC=LUX × 0.0929)

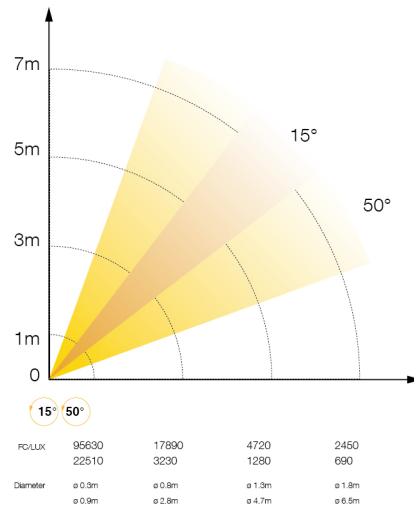

**9.5KG**