



JNR PAR ZOOM 3610

■ JNR-8134A

The JNR PAR ZOOM 3610 adopts 36 PCS 10W 4-in-1 LEDs which features high brightness and stability. It is made of a new type of high temperature strength of castaluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.


Specification

- Input Voltage: AC 90-260V 50/60Hz
- Light Source: 36x10W LEDs (4-in-1, RGBW)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 5/9 DMX channels USITT DMX-512
- Power Consumption: 360W
- Dimensions: 300(D)*295(W)*400(H)mm
- Packing Dimensions: 290(D)*290(W)*390(H)mm
- Net Weight: 4.5kg
- Gross Weight: 5kg


Detail

- 36x10W LEDs (4-in-1, RGBW), 50,000 hours
- High light output with even color mixing
- Motorized linear zoom from 8° to 60°
- 0-100% Smooth LED dimmer
- Flicker free control system for TV production and film
- High efficiency LED shutter with variable speed
- Strobe effect with 1-25T/s and pulse effect
- LED rainbow effect
- Built-in default programs
- Macro effects
- DMX512, master-slave and sound activated controllable or auto operation
- 5/9 DMX channels USITT MDX-512
- 4-Button LED display control menu
- Low noise efficient fan cooling system
- Power connector IN
- 3-Pin DMX connectors IN/OUT
- -35°C~45°C Ambient temperature
- Dual mounting brackets for installation/floor stand
- Power link up to 4 units at 120V and 8 units at 230V
- IP20

Light Output (FC=LUX × 0.0929)

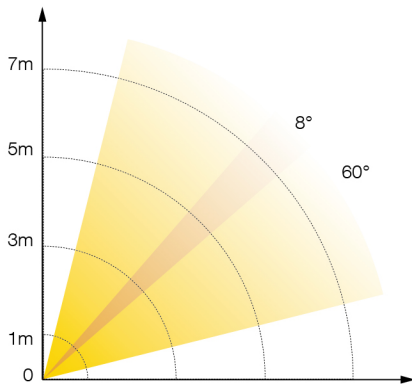

	8°	60°		
R	1357	177	60	35
	4692	600	112	120
G	4602	561	200	107
	10664	1478	246	302
B	114	135	47	26
	1342	1072	400	243
W	6841	842	300	160
	17415	2486	641	461
RGBW	12091	1583	504	290
	34557	4858	981	880



4.5KG