



JNR PAR ZOOM 3615

■ JNR-8134B

The JNR PAR ZOOM 3615 adopts 36 PCS 15W 5-in-1 LEDs which features high brightness and stability. It is made of a new type of high temperature strength of castaluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.


Specification

- Input Voltage: AC 90-260V 50/60Hz
- Light Source: 36x15W LEDs(5-in-1, RGBWA)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 6/10 DMX channels USITT DMX-512
- Power Consumption: 480W
- Dimensions: 300(D)*295(W)*400(H)mm
- Packing Dimensions: 290(D)*290(W)*390(H)mm
- Net Weight: 4.5kg
- Gross Weight: 5kg


Detail

- 36x15W LEDs (5-in-1, RGBWA), 50,000 hours
- High light output with even color mixing
- Motorized linear zoom from 8° to 60°
- 0-100% Smooth LED dimmer
- Flicker free control system for TV production and film
- High efficiency LED shutter with variable speed
- Strobe effect with 1-25T/s and pulse effect
- LED rainbow effect
- Built-in default programs
- Macro effects
- DMX512, master-slave and sound activated controllable or auto operation
- 6/10 DMX channels USITT MDX-512
- 4-Button LED display control menu
- Low noise efficient fan cooling system
- Power connector IN
- 3-Pin DMX connectors IN/OUT
- -35°C~45°C Ambient temperature
- Dual mounting brackets for installation/floor stand
- Power link up to 4 units at 120V and 8 units at 230V
- IP20

Light Output (FC=LUX × 0.0929)

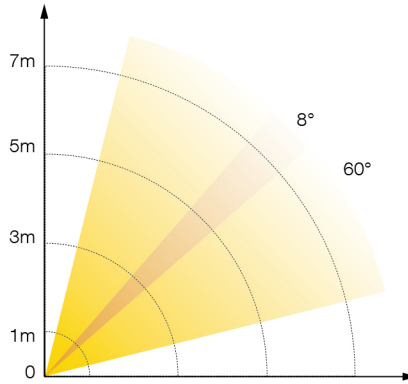

	8°	60°		
R	1044	136	46	27
	3128	461	86	92
G	3640	432	153	82
	8603	1137	224	233
B	868	104	36	20
	1032	825	308	187
A	1650	133	70	26
	2576	176	176	71
W	5262	648	230	122
	13396	1897	493	355
RGBAW	10951	1351	458	249
	29158	3913	931	748

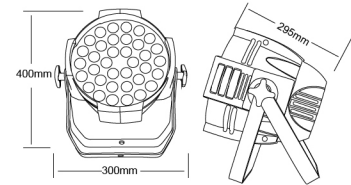

4.5KG