



The JNR PAR 54 x 3 adopts 54 PCS (3-in-1, RGB) 3W LEDs which features high brightness and stability. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.



JNR PAR 54x3

■ JNR-8047B


Specification

- Input Voltage: AC 90-260V 50/60Hz
- Light Source: 54x3W LEDs(3-in-1 RGB)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 7 DMX channels USITT DMX-512
- Power Consumption: 170W
- Dimensions: 305(D)*220(W)*325(H)mm
- Packing Dimensions: 250(D)*250(W)*360(H)mm
- Net Weight: 5.88kg
- Gross Weight: 6.64kg


Detail

- 54 PCS 3W (3-in-1) LEDs, 50,000 hours
- Automatic operation with built-in programs
- DMX512 controllable
- 7 DMX Channels USITT DMX-512
- Master-slave operation
- Sound activation
- RGB color mixing system
- 25° Beam angle
- 0-100% electronic dimming
- High speed white color or color changing strobe with 1-13Hz frequency range
- LED display
- 3-pin XLR connectors IN/OUT
- Constant current drive mode
- 40°max environment temperature
- 60°max par light temperature
- T0.8A fuse
- IP20

Light Output (FC=LUX × 0.0929)

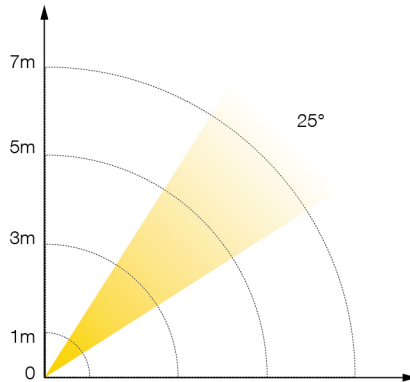

R	4300	578	190	128
G	4860	592	226	108
B	10900	1226	448	224
RGB	18240	2208	790	424

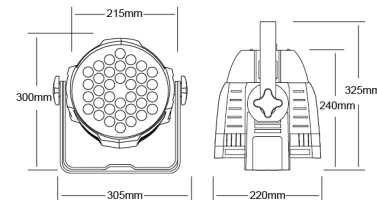

5.88KG