







PR-6000 Wash/Framing

Model: PR-2926

RoHS | CE |  |  WDMX | 1400W |  10m |  IP₂₀ | T_c150°C | T_a40°C | 

PR 6000 Wash/Framing is a new hybrid, most advanced powerful moving head, equipped with 1400W lamp. The fixture features a unique wash/framing optical design, 4 framing blades with endless rotation and 66° wide wash, along with multiple color and CMY system, resulting in revolutionary new lighting looks for the largest lighting applications.



Wash and Framing, high power 

Moving Heads



Scan with your Phone to view more detail

Color Wheel

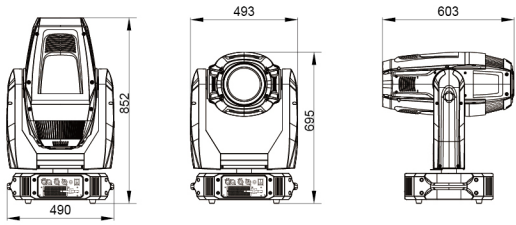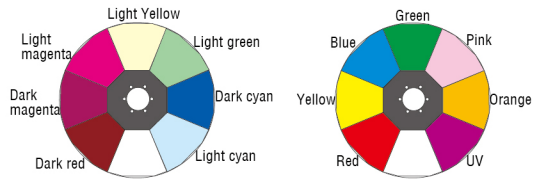

45Kg 
Size(mm)

Specifications

- Input Voltages
200-240V AC, 50/60Hz
- Power Consumption
1800W@220V
- Light Source
OSRAM lok-it 1400/PS(CRI>90, 6000K, 750 hrs)
- Strobe
Double shutter blades, 0.3-25 F.P.S
- Dimmer
0-100% linear adjustment
- Colors
CMY+CTO linear mixing system with macros
2 Color wheels: each with 7 dichroic color filters plus open
Half color effect, rainbow effect with bi-directional and
variable speeds
Stepping/linear color changing
- CTO
0-100% linear CTO system
- Frost
One frost filters, linear frost effect
- Framing
4 Sets of framing blades
Framing module endless rotation with many graphics of
different sizes and shapes, curtain effect
- Iris
5-100% linear adjustment with macros
- Zoom
DMX linear zoom
- Head Movement
Pan 540°, tilt 270° with auto position correction
- Light Angle
10°~ 60°
- Control
International DMX512, 5 pins(optional 3 pins) interface
RDM control protocol
Short mode 28 channels, standard mode 32 channels and
extended mode 39 channels
Self-test mode
- Other Functions
Adjustable pan & tilt speed
Lamp and total hours displayed
LCD English display with contrast and brightness adjustable
Energy saving ballast
Built-in sensor diagnostic system
Built-in chargeable battery and menu setting without power
mains
Input signal isolation
Modular structure for easy maintenance
Ethernet interface
DMX512 wireless receiver
DMX512 wireless transmitter
- Physical
Housing: composite plastic, IP20
Ambient working temperature: maximum 40°C
- Weight
Net weight: 45Kg
- Packaging
Standard: carton 860x670x775(mm)
Optional: flight case N/A
- Accessories
G clamp, 2 pcs
5 pins XLR connector, 1 set
Safety cord, 2 pcs
Power cord, 1 pc

Optional: Ω clamp 2 pcs

