







XR 330 Beam II

Model: PR-2344


RoHS | CE |  |  |  | 330W |  12m |  | T_c150°C | T_a40°C | 

XR 330 Beam II is a new launched product, equipped with a SIRIUS HRI 330W lamp. Features include 1 color wheel with 13 colors; 1 fixed gobo wheel with 16 gobos and 1 rotating gobo wheel with 12 gobos; 3 prisms, etc. The fixture is perfect for small and medium installation applications.

Beam, 3 Prisms






Fixed gobos

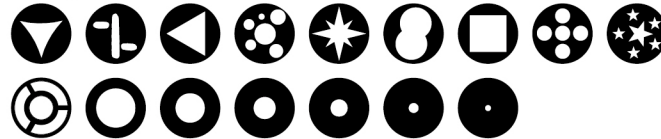

Rotating gobos (Ø12mm, image Ø6.0mm)



Scan with your Phone to view more detail



16Kg 
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
430W@220V
- Light Source
OSRAM SIRIUS HRI 330W(8,000K, 1500 hrs)
- Strobe
Double shutter blades, 0.3-20 F.P.S
- Dimmer
0-100% linear adjustment
- Colors
1 Color wheel: 13 dichroic colour filters(with CTO) plus open
Variable speed and bi-directional rainbow effect
Stepping/linear colour changing is available
- Gobos
1 Fixed gobo wheel: 16 fixed gobos plus open
Shaking and bi-directional wheel scrolling at variable speeds
1 Rotating gobo wheel: 12 rotating gobos plus open
Shaking and bi-directional wheel scrolling at variable speeds
Gobo is replaceable
- Prism
One 8-facet prism
- Effect
Two prisms(16-facet and linear prisms)+frost filter plus open
Focus
- Motorized linear focus
- Head Movement
 - Pan 540° and tilt 270°, with auto position correction
 - Swap and invert functions of pan and tilt
- Light Angle
3°
- Control
International DMX512, 5 pins(optional 3 pins) interface
Short mode 15 channels, standard mode 19 channels
Adjustable mode
- Other Functions
Adjustable pan & tilt speed
Touch screen
Fixture and lamp usage time display
Modular construction for easy maintenance
DMX512 wireless receiver(optional)
DMX512 wireless transmitter(optional)
- Physical
Housing: high temperature resistant engineering plastics,
IP20
Ambient temperature: maximum 40°C
- Weight
Net weight: 16kg
- Packaging
Standard: carton 575x455x495(mm)
Optional: flight case 770x510x720(mm), 2 in 1
- Accessories
G clamp, 2 pcs
5 pins XLR connector, 1 set
Safety cord, 1 pc
Power cord, 1 pc
Optional: Ω clamp, 2 pcs

