

CUBIX 500

Model: PR-6600

RoHS | CE | LED | $\sim 1.5\text{m}$ | IP65 | $T_c 150^\circ\text{C}$ | $T_a 40^\circ\text{C}$ | 

This is a high temperature resistant and high-brightness luminaire, equipped with a 250W LED lamp. It features color wheel, gobo wheel, animation flame effect wheel, two prisms, $8^\circ\sim 40^\circ$ zoom, rating IP65, etc. It's widely applied in urban buildings lighting, landscape lighting and other multi- scale of locations.


IP65, Gobo Effect



Architectural Lighting



Scan with your Phone
to view more detail

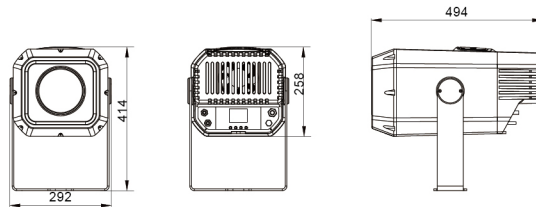

18.5Kg
Size(mm)

Specifications

- Input Voltages
100V~240V AC,50/60Hz
- Power Consumption
350W@220V
- Light Source
250W white LED(6,500k), 50,000 hrs
- Strobe
Electronic strobe, 0-25 F.P.S(preset pulse strobe effect)
- Dimmer
0-100% linear adjustment
- Colors
1 Color wheel: 7 dichroic color filters(with CTO) plus open
Half color effect, rainbow effect and variable speeds
Stepping/linear color changing
- Gobos
1 Rotating gobo wheel: 7 gobos plus open, gobos can be fixed
Shaking at variable speed and bi-directional scrolling effect
- Prism
Two prisms(3-facet prism and 4-facet prism), bi-directionally rotating
- Effect
1 Flame effect wheel, with bi-directional rotation, animation wheel is replaceable
- Light Angle
Beam angle(1/2 peak) $\theta_{1/2}$: 8°~40°
- Focus
DMX linear focus
- Zoom
DMX linear zoom
- Control
International DMX512, 3 pins(optional 5 pins) interface
Short mode 14 channels, standard mode 17 channels, and extended mode 19 channels
Master-slave mode
Preset memories and user memory mode
- Other Functions
LCD panel
Over temperature protection
Fast and convenient software upgrade via DMX512 interface
- Physical
Housing: high-intensity die-casting aluminum, IP65
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 18.5kg
- Packaging
Standard: carton 610x385x355(mm)
Optional: flight case 830x555x320(mm), 2 in 1
- Accessories
C clamp, 1 pc
Signal adapter cord, 2 pcs
Power cord, 1 pc
Safety cord, 1 pc

