



The JNR BAR 14x30 adopts 14 PCS 30W LEDs which features high brightness and stability. It is made of a new type of high temperature strength of aluminum casing with nice outlook. The fixture is available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, night-clubs and discos.



JNR BAR 14x30

■ JNR-8019A/B

Specification


- Input Voltage: AC 90-260V 50/60Hz
- LED Quantities:
 JNR-8019A: 14x30W LEDs (4-in-1, RGBW)
 JNR-8019B: 14x30W LEDs (3-in-1, RGB)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 4/5/6/10/33/42/56/61(8019A), 2/3/5/8/42/44(8019B) DMX channels
- Power Consumption: 200W
- Dimensions: 1000(W)*76(D)*163(H)mm
- Packing Dimensions: 1140(W)*170(D)*240(H)mm
- Net Weight: 6.96kg
- Gross Weight: 8.16kg

CE | LED (—) 0.2m | IP65 | T_c100°C | T_a45°C |


Detail

- 14x30W tri color LEDs
- 16. 7 Millions of colors mixable
- 50, 000 Hours lifespan and lower power consumption
- Stunning light output with high intensity and high color rendering index
- High efficiency 40mm PMMA optics, 15 ° / 25 ° / 55 ° beam angles as optional
- 0- 100% smooth linear electronic dimmer
- Flicker free control capability
- 25T/s high speed LED shutter/ strobe effect with variable speed
- Dynamic macro effect with variable speed
- 12 Internal color running programs, available for strobe effect together
- 13 DIY internal color running programs with background, foreground colors changeable, available for strobe effect together
- DMX512, master-slave and sound activated controllable or auto operation
- 2/4/6/9/56/58(8019A), 2/3/5/8/42/44(8019B)DMX channel modes
- Rugged, die cast aluminum alloy, compact and light weight
- Noise free natural cooling system
- Front window with tempered glass
- 2 Multi- positioning brackets for floor projection or hanging projections

- Manual tilt angle adjustment
- 4 Button red LED display
- IP65 rated lockable power connectors IN/ OUT
- IP65 rated lockable 3- pin XLR DMX connectors IN/ OUT
- - 40°C to 45°C operation temperature
- IP65

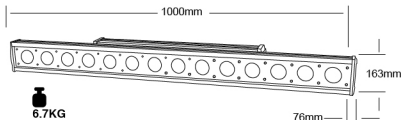

Light Output (FC=LUX × 0.0929)

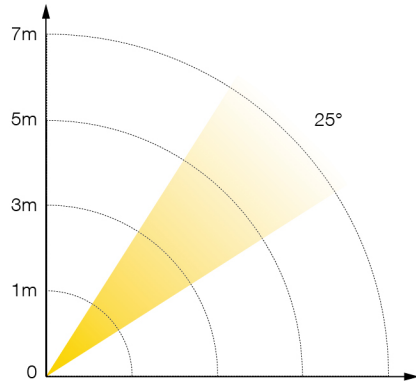

JNR-8019A

R	880	330	110	55
G	1650	550	220	110
B	1430	495	198	55
W	1595	550	220	110
RGBW	5280	990	440	165

JNR-8019B

R	3810	680	680	130
G	3990	710	270	150
B	5320	890	340	190
RGB	12230	2310	670	410