



The JNR PAR 24x10 adopts 24 PCS 10W 4-in-1 LEDs which features high brightness and stability. It's made of a new type of high temperature strength of castaluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It' s available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.



JNR PAR 24x10

■ JNR-8045B

Specification


- Input Voltage: AC 90-260V 50/60Hz
- Light Source: 24x10W LEDs (4-in-1, RGBW)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 8 DMX channels USITT DMX-512
- Power Consumption: 240W
- Dimensions: 220(D)*305(W)*325(H)mm
- Packing Dimensions: 260(D)*260(W)*380(H)mm
- Net Weight: 4kg
- Gross Weight: 4.7kg

CE | LED | 0.2m | IP20 | T:40°C |

Detail

- 24x10W LEDs (4-in-1, RGBW), 100,000 hrs
- Aluminum die-casting structure design with optimum cooling system
- Infinite RGBW color mixing system and rainbow effect
- 16.7million additive RGB colors whit full saturation control
- DMX512, Master-Slave, Sound Activated and auto operation
- 8 DMX channels
- Built-in programs that could be called up via a DMX controller
- 0-20Hz strobe effect and pulse strobe effect
- 0-100% electronic dimming and blackout for all LEDs
- Independent ID address
- Different white colors setting
- 25° beam angle
- 4-button LED display on rear panel
- Dual bracket system available for setting the fixture on the ground or hanging
- Linkable via 3-pin XLR cables
- Overheat protection
- -20°C~40°C environment temperature
- T0.8A fuse
- IP20

Light Output (FC=LUX × 0.0929)

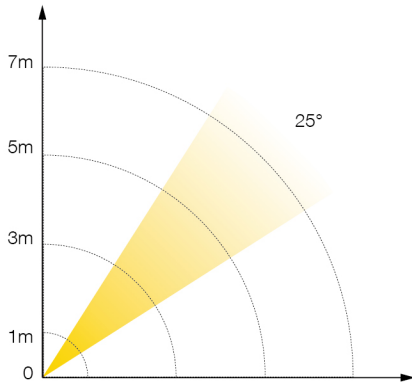

R	2486	278	98	53
G	4719	514	186	92
B	6039	671	246	127
W	5379	593	206	109
RGBW	15698	1699	607	317

