






AQUA Marine 580 BWS

Model: PR-2596


RoHS | CE |  |  | 550W |  18m |  | T_c150°C | T_a45°C | 

Corrosion-Resistant versions of AQUA 580 BWS, AQUA Marine 580 BWS can provide superior resistance to a wider range of corrosive media, making them ideal for use on projects close to the seashore or in seawater.

IP66, Marine grade, 3 in 1




Fixed gobos

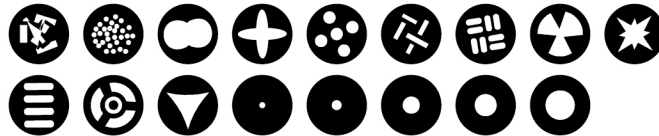

Rotating gobos (Ø22.5mm, image Ø9mm)



Scan with your Phone
to view more detail

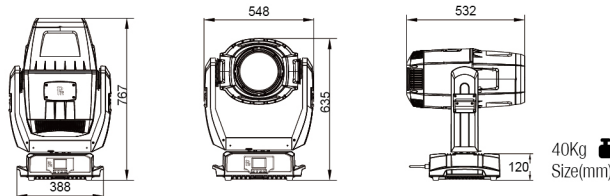

Specifications

- **Input Voltages**
100-240V AC, 50/60Hz
- **Power Consumption**
800W@220V
- **Light Source**
PHILIPS MSD Platinum 25R (550W), (7,800K, 1,500 hrs)
Optional: OSRAM SIRIUS HRI 550W XL, (7,500K, 1,500 hrs)
- **Strobe**
Double shutter blades, 0.3-25 F.P.S
- **Dimmer**
0-100% linearly dimming
- **Colors**
CMY linear color mixing system with macros
1 Color wheel: 12 dichroic color filters plus open
Rainbow effect with bi-directional and variable speeds
Stepping/linear color changing
- **Gobos**
1 Fixed gobo wheel: 17 gobos plus open
Bi-directionally rotatable, and shakable effect at variable speeds
1 Rotating gobo wheel: 7 interchangeable gobos plus open
Bi-directionally rotatable, and shakable at variable speeds
- **Prism**
Four prisms(standard: 8-facet circular+4-facet linear+9-facet circular and gradient prisms), bi-directional rotation with variable speeds, optional: other prisms
- **Frost**
One frost filter, linear frost effect
- **Effect**
1 Effect wheel, can overlap with gobos, bi-directional rotation with variable speeds
- **Focus/Zoom**
DMX linear focus/zoom
- **Head Movement**
Pan 540°, tilt 270° with auto position correction
- **Light Angle**
Beam mode: 0°~2°
Spot mode: 2°~40°
Wash mode: 3°~50°
- **Control**
International DMX512, 5 pins(optional 3 pins) interface
RDM control protocol
Short mode 25 channels, standard mode 31 channels and extended mode 35 channels
Self-test mode
- **Other Functions**
Adjustable pan & tilt speed
LCD display screen
Fixture and lamp usage time display
Modular structure for easy maintenance
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- **Physical**
Housing: cast aluminum and high temperature UV resistant
ABS, IP66
Ambient temperature: maximum 45°C
- **Weight**
Net weight: 40Kg
- **Packaging**
Standard: carton
Optional: flight case
- **Accessories**
G clamp, 2 pcs
5 Pins XLR connector, 1 set
Safety cord, 1 pc
Power cord, 1 pc
Optional: Ω clamp, 2 pcs

