


AQUA Marine 580 Beam

RoHS | CE |  |  |  | 550W |  18m |  | T_c150°C | T_a45°C | 


Model: PR-2568

Corrosion-Resistant versions of AQUA 580 Beam, AQUA Marine 580 Beam can provide superior resistance to a wider range of corrosive media, making them ideal for use on projects close to the seashore or in seawater.

IP66, Marine grade, Beam 




Fixed gobos

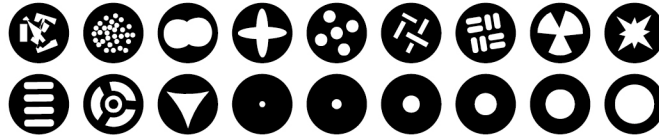

Rotating gobos (Ø22.5mm, image Ø9mm)



Scan with your Phone to view more detail

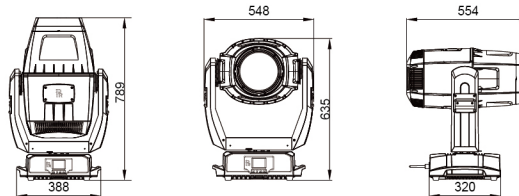

40Kg 
Size(mm)

Specifications

- **Input Voltages**
100-240V AC, 50/60Hz
- **Power Consumption**
800W@220V
- **Light Source**
PHILIPS MSD Platinum 25R (550W), (7,800K, 1,500 hrs)
Optional: OSRAM SIRIUS HRI 550W XL, (7,500K, 1,500 hrs)
- **Strobe**
Double shutter blades, 0.3-25 F.P.S
- **Dimmer**
0-100% linearly dimming
- **Colors**
CMY linear color mixing system with macros
1 Color wheel: 12 dichroic color filters plus open
Rainbow effect with bi-directional and variable speeds
Stepping/linear color changing
- **Gobos**
1 Fixed gobo wheel: 18 gobos plus open
Bi-directionally rotatable, and shakable effect at variable speeds
1 Rotating gobo wheel: 7 interchangeable gobos plus open
Bi-directionally rotatable, and shakable at variable speeds
- **CTO**
Independent 0-100% linear CTO
- **Prism/Frost**
Three prisms(standard: 8-facet circular+ 4-facet linear+ 16-facet circular prisms), bi-directional rotation with variable speeds, 1 combined frost filter
- **Focus**
DMX linear focus
- **Head Movement**
Pan 540°, tilt 270° with auto position correction
- **Light Angle**
Beam angle: 2°
- **Control**
International DMX512, 5 pins(optional 3 pins) interface
RDM control protocol
Short mode 22 channels, standard mode 26 channels and extended mode 30 channels
Self-test mode
- **Other Functions**
Adjustable pan & tilt speed
LCD display screen
Fixture and lamp usage time display
Modular structure for easy maintenance
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- **Physical**
Housing: cast aluminum and high temperature UV resistant
ABS, IP66
Ambient temperature: maximum 45°C
- **Weight**
Net weight: 40Kg
- **Packaging**
Standard: carton
Optional: flight case
- **Accessories**
G clamp, 2 pcs
5 Pins XLR connector, 1 set
Safety cord, 1 pc
Power cord, 1 pc
Optional: Ω clamp, 2 pcs

