






AQUA 480 Beam

Model: PR-2469


RoHS | CE |  |  WDMX | 480W |  18m |  IP₆₅ | T_c150°C | T_a42°C | 

AQUA 480 Beam is waterproof-IP65 and large aperture beam. It can produce sharp beam effect (beam angle is 3.1°). The central illumination is 182,334 Lux at 20m and 81,037 Lux at 30m. It can provide a number of effects combined with CMY linear color mixing system, 18 fixed gobos and 7 rotating gobos. It is ideal for your outdoor entertainment, concert stadium and all kinds of activities.

IP65, 480W, Beam






Fixed gobos

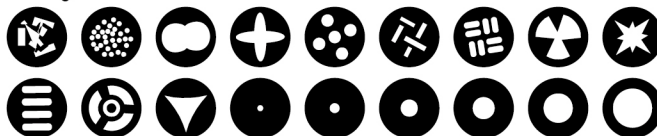

Rotating gobos(Ø22.5mm, image Ø9mm)



Scan with your Phone
to view more detail



46Kg
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
650W@220V
- Light Source
USHIO PR 480(480W), (6,900±300K, 1,500 hrs)
- Strobe
Double shutter blades, 0.3-25 F.P.S
- Dimmer
0-100% linearly dimming
- Colors
CMY linear color mixing system with macros
1 Color wheel: 11 dichroic color filters+CTO plus open
Rainbow effect with bi-directional and variable speeds
Stepping/linear color changing
- Gobos
1 Fixed gobo wheel: 18 gobos plus open
Bi-directionally rotatable, and shakable effect at variable speeds
1 Rotating gobo wheel: 7 interchangeable gobos plus open
Bi-directionally rotatable, and shakable at variable speeds
- Prism
Two individual prisms(standard: 8-facets and 16-facets)
Bi-directionally rotating at variable speeds
Optional: 3-facet, 16-facet, gradient and linear prisms
- Frost
One frost filter
- Focus
DMX linear focus
- Head Movement
Pan 540°, tilt 270° with auto position correction
- Light Angle
Beam angle: 3.1°
- Control
International DMX512, 5 pins interface
RDM control protocol
Short mode 19 channels, standard mode 26 channels and extended mode 29 channels
Self-test mode
- Other Functions
Adjustable pan & tilt speed
LCD display screen
Fixture and lamp usage time display
Modular structure for easy maintenance
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- Physical
Housing: cast aluminum and high temperature UV resistant
ABS, IP65
Ambient temperature: maximum 42°C
- Weight
Net weight: 46Kg
- Packaging
Standard: carton 740x740x670(mm)
Optional: flight case 620x570x780(mm)
- Accessories
G clamp, 2 pcs
5 Pins XLR connector, 1 set
Safety cord, 1 pc
Power cord, 1 pc
Optional: Ω clamp, 2 pcs

