

AQUA 380 BWS

Model: PR-2366


RoHS | CE |  |  | WDMX | 380W |  18m |  | T_c150°C | T_a40°C | 

AQUA 380 BWS is waterproof IP66 moving head which integrates three features(Beam, Wash, Spot) in a single unit, it adopted PR patented technology, combines advanced Philips longlife Platinum 300S Flex lamp with superb optical system, it is your best choice for outdoor activities.

IP66, 380W, 3 in 1 




Fixed gobos

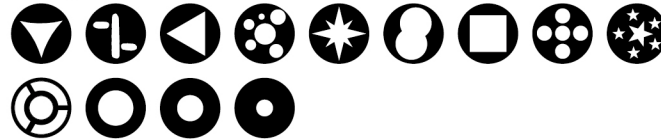

Rotating gobos(Ø12mm, image Ø5.5/6.0mm)



Scan with your Phone to view more detail

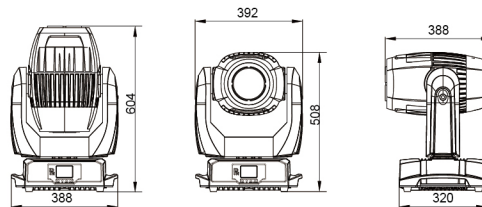

29Kg 
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
570W@220V, 600W@100V
- Light Source
PHILIPS Platinum 300S Flex(7,800±300K), 6000 hrs
- Strobe
Single blade, 0.3-20 F.P.S
- Dimmer
0-100% linearly dimming
- Colors
CMY linear color mixing system with macros
1 Color wheel: 12 dichroic color filters+CTO plus open
Rainbow effect with bi-directional and variable speeds
Stepping/linear color changing
- Gobos
1 Fixed gobo wheel: 11 gobos and animation effect plus open
Bi-directionally rotatable, and shakable effect at variable speeds
1 Rotating gobo wheel: 12 interchangeable gobos plus open
Bi-directionally rotatable, and shakable at variable speeds
- Prism/Frost
Three prisms(standard: 2x6-facet circular prisms and one linear prism)+frost+open, bi-directional rotation with variable speeds
Optional: 3-facet, 16-facet and gradient prisms
- Focus
DMX linear focus
- Zoom
DMX linear zoom
- Head Movement
Pan 540°, tilt 240° with auto position correction
- Light Angle
Beam mode: 0°~2.5°
Spot mode: 2.5°~40°
Wash mode: 7°~35°
- Control
International DMX512, 5 pins interface
RDM control protocol
Short mode 23 channels, standard mode 27 channels and extended mode 32 channels
Self-test mode
- Other Functions
Adjustable pan & tilt speed
LCD display screen
Fixture and lamp usage time display
Modular structure for easy maintenance
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- Physical
Housing: cast aluminum and high temperature UV resistant
ABS, IP66
Ambient temperature: maximum 40°C
- Weight
Net weight: 29Kg
- Packaging
Standard: carton 515x480x690(mm)
Optional: flight case 715x516x835(mm), 2 in 1
- Accessories
G clamp, 2 pcs
5 Pins XLR connector, 1 set
Safety cord, 1 pc
Power cord, 1 pc
Optional: Ω clamp, 2 pcs

