







# XR 1400 Wash


Model: PR-2735

RoHS | CE |  |  | 1400W |  10m |  | T<sub>c</sub>150°C | T<sub>a</sub>40°C | 


XR 1400 Wash produces extreme - output from its OSRAM 1400W engine which is calibrated at 6000K. Adding to the fixture's versatility are its precise CMY + CTO color mixing and a 20° to 62° motorized zoom that maintains a flat field of focus even when fully wide. Thanks to its two color wheels(each wheel with 7 colors plus open), the fixture produces an infinite palette of vivid pastels and saturated colors. This feature-rich fixture also offers a variety of control options including DMX, RDM protocol, ArtNet or W-DMX.

Wash, 1400W 

Color Wheel

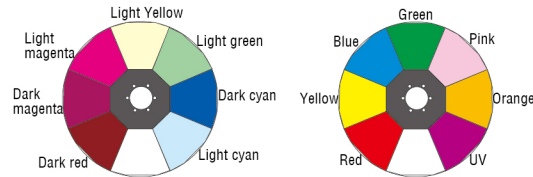

Scan with your Phone to view more detail

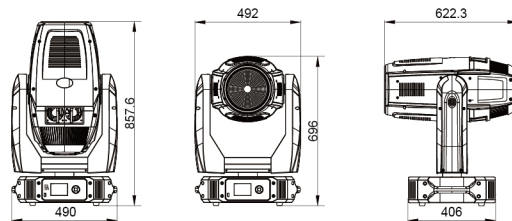

46Kg   
Size(mm)

Moving Heads

## Specifications

- Input Voltages  
200-240V AC, 50/60Hz
- Power Consumption  
1700W@220V
- Light Source  
OSRAM lok-it 1400W/PS(6,000K, 750 hrs)
- Strobe  
Double shutter blades, 0.3~25 F.P.S
- Dimmer  
0-100% linear adjustment
- Colors  
CMY linear color mixing with macros  
2 Color wheel: each with 7 dichroic color filters plus open  
Half color effect, rainbow effect with bi-directional and  
variable speeds  
Stepping/linear color changing
- CTO  
0-100% linear CTO system
- Zoom  
DMX linear zoom
- Head Movement  
Pan 540°, tilt 270° with auto position correction
- Light Angle  
12° in highlight mode  
20°~62°
- Control  
International DMX512, 3 pins interface  
RDM control protocol  
Short mode 14 channels, standard mode 19 channels,  
extended mode 24 channels, self-test mode
- Other Functions  
Adjustable pan & tilt speed  
Lamp and total hours displayed  
LCD English display with contrast and brightness adjustable  
Touch screen  
Energy saving ballast  
Input signal isolation  
Modular structure for easy maintenance  
Ethernet interface  
DMX512 wireless receiver  
DMX512 wireless transmitter(optional)
- Physical  
Housing: high temperature engineering plastic, IP20  
Ambient temperature: maximum 40°C
- Weight  
Net weight: 46Kg
- Packaging  
Standard: carton  
Optional: flight case
- Accessories  
G clamp, 2 pcs  
5 pins XLR connector, 1 set  
Safety cord, 1 pc  
Power cord, 1 pc  
Optional: Ω clamp, 2 pcs

