








# XR 230 Beam

Model: PR-2205





230W
 12m

T<sub>c</sub>150°C | T<sub>a</sub>40°C


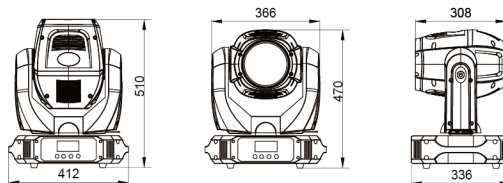
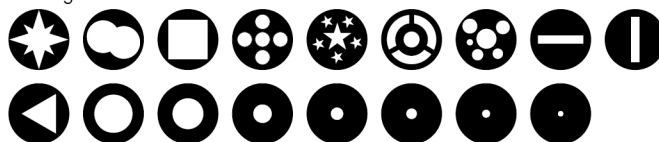
Equipped with OSRAM 230W HRI lamp, moving beam light with a brightness usually achievable only with far greater wattages, weighing just 16kg, it produces a perfectly parallel, laser-like beam with an incredible output of 68,600 lux at 20m.

Beam, OSRAM 230W



Scan with your Phone  
to view more detail

Fixed gobos



16Kg  
Size(mm)

## Specifications

- Input Voltages  
100-240V AC, 50/60Hz
- Power Consumption  
310W@220V
- Light Source  
OSRAM SIRIUS HRI 230W (8,000K, 2,000 hrs)
- Strobe  
Double shutter blades, 0.3-20 F.P.S
- Dimmer  
0-100% linear adjustment
- Colors  
1 Color wheel: 14 dichroic color filters plus open  
Variable speed and bi-directional rainbow effect  
Stepping/linear colour changing is available
- Gobos  
1 Fixed gobo wheel: 17 fixed gobos plus open  
Shaking and bi-directional wheel scrolling at variable speeds  
Gobo changing is available
- Effect  
One 8-facet prism+CTO+frost filter plus open  
Bi-directional with variable speeds
- Focus  
Motorized linear focus
- Head Movement  
Pan 540° and tilt 270°, with auto position correction  
Swap and invert functions of pan and tilt
- Light Angle  
4°
- Control  
International DMX512, 5 pins(optional 3 pins) interface  
Short mode 10 channels, standard mode 14 channels and  
extended mode 16 channels  
Self-test mode
- Other Functions  
Adjustable pan & tilt speed  
Fixture and lamp usage time display  
Modular construction for easy maintenance  
DMX512 wireless receiver(optional)  
DMX512 wireless transmitter(optional)
- Physical  
Housing: composite plastics, IP20  
Ambient temperature: maximum 40°C
- Weight  
Net weight: 16kg
- Packaging  
Standard: carton 565x445x485(mm)  
Optional: flight case 770x510x720(mm), 2 in 1
- Accessories  
G clamp, 2 pcs  
5 pins XLR connector, 1 set  
Safety cord, 1 pc  
Power cord, 1 pc  
Optional:  $\Omega$  clamp, 2 pcs

