






XLED 3019

Model: PR-8127


RoHS | CE |  |  | LED |  5m |  | T_c150°C | T_a40°C | 

Containing 19x20W LEDs(RGBW 4 in 1), this is able to offer a variable beam ranging from 7°~42 ° and beautiful wash field, making it ideal for all applications where perfection is required.

RGBW, 19 LEDs



Scan with your Phone
to view more detail

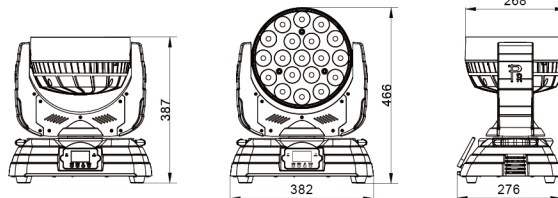

13Kg 
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
400W@220V
- Light Source
LED ENGIN 19x20W LEDs(RGBW, 4 in 1), 50,000 hrs
- Strobe
Electronic strobe, 0-25 F.P.S, pulse strobe
- Dimmer
0-100% linear adjustment
- Colors
R/G/B/W and color mixing, with macros
Rainbow effect
Linear color temperature correction from 2,700K to 10,000K
- Head Movement
Pan 540°, tilt 270° with auto position correction
Swap and invert functions of pan and tilt
- Light Angle
Beam angle(1/2 peak): 7°~ 42 °
Field angle(1/10 peak): 17°~ 60°
- Control
International DMX512, 3 pins and 5 pins interface
RDM control protocol
Standard mode 12 channels and extended mode 20 channels
Master-slave mode, self-test mode, manual test mode
- Other Functions
Adjustable pan & tilt speed
LCD display and its brightness adjustable
Lamp temperature & project's use time display
DMX512 wireless receiver
DMX512 wireless transmitter(optional)

- Physical
Housing: high temperature, ABS+die-casting aluminum, IP20
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 13kg
- Packaging
Standard: carton 455x450x420(mm)
Optional: flight case 785x440x655(mm), 2 in 1
- Accessories
G clamp, 2 pcs
5 pins XLR connector, 1 set
Safety cord, 1 pc
Power cord, 1 pc
Optional: Ω clamp, 2 pcs

