



XLED 4007 Beam

Model: PR-8126


RoHS | CE | DMX | LED | 5m | IP20 | T_c150°C | T_a40°C | 

XLED 4007 Beam is fitted with high power multichip RGBW LEDs that produce a full range of vivid colors, while the colors of each LED may be controlled separately.

RGBW, smart, high power LED 



Scan with your Phone
to view more detail

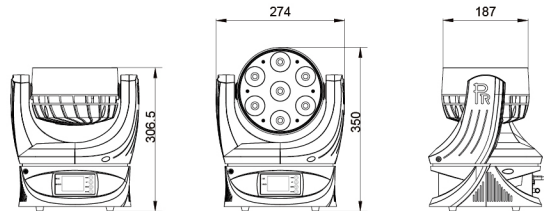

5.7Kg
Size(mm)

LED Lighting

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
320W@220V
- Light Source
OSRAM 7x40W LEDs (R/G/B/W, 4 in 1), 50,000 hours
- Strobe
Electronic strobe, 0-25 F.P.S, pulse strobe effects
- Dimmer
0-100% linear adjustment
- Colors
R/G/B/W and color mixing, with macros
Color temperature linearly adjustable
Rainbow and animation effects
- Head Movement
Pan: 720°, 360° or endless, tilt: 270° or Endless
Pan tilt swap and invert function; auto-position correction
- Light Angle
Beam angle(1/2 peak): 7°
Filed angle(1/10 peak): 13°
- Control
International DMX512, 5 pins interface
Standard mode 18 channels and extended mode 43 channels
Master-slave mode, stand-alone mode, preset memory
Self-test mode, single scene mode
- Other Functions
Pixel control
Touch keys, LCD display
Display's brightness and contrast adjustable
Sound operation
Adjustable pan & tilt speed
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
Firmware upgraded via DMX interface

- Fixture and lamp usage time display
- Software version display
- Menu invert
- Over temperature protection

- Physical
Housing: high temperature resistant engineering plastics,
IP20
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 5.7kg
- Packaging
Standard: carton 386x326x356(mm)
Optional: flight case 1175x675x583(mm), 6 in 1
- Accessories
G clamp, 1 pc
5 pins XLR connector, 1 set
Safety cord, 1 pc
Power cord, 1 pc
Optional: Ω clamp, 1 pc

