






ARC LED 1536

Model: PR-6260

RoHS | CE |  |  WDMX | LED |  1.5m |  IP₆₇ | T_c150°C | T_a45°C | 

ARC LED 1536 is a new powerful architectural light, contains PHILIPS 36 pcs 15W LEDs (RGBW 4 in 1). It's ideal for corporate event, festivals and outdoor stage washes.


IP67, RGBW 4 in 1



Architectural Lighting



Scan with your Phone
to view more detail

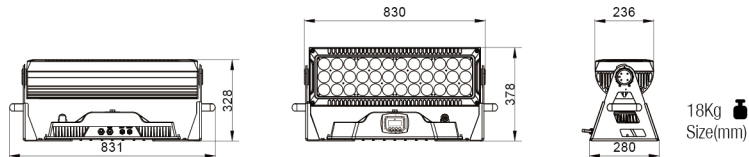

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
540W@230V
- Light Source
36x15W(RGBW 4 in 1), 50,000 hrs
- Strobe
Electronic strobe, 0-25 F.P.S
- Dimmer
0-100% linearly adjustable
- Colors
R/G/B/W and color mixing , with macro
- Head Movement
Tilt 270°, manual adjustment
- Light Angle
Field angle(1/2 peak) $\theta_{1/2}$: 16°x18°
Field angle (1/10 peak) $\theta_{1/10}$: 34°x 56°
- Control
International DMX512, 3 pins(optional 5 pins) interface
Standard mode 10 channels, extended mode 23 channels,
Master-slave mode, test mode
DMX mode, preset memory mode and user memory mode
- Other Functions
LED board temperature display
Fixture usage time display
Brightness level control
Timer control
Parameters like operation mode and etc. transmitted under
synchronization
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- Physical
Housing: high-intensity die-casting aluminum, IP67
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 27kg
- Packaging
Standard: carton 795x530x420(mm)
Optional: flight case 900x760x430(mm), 2 in 1
- Accessories
G clamp, 2 pcs
Signal adapter cord, 2 pcs
Safety cord, 1pc
Optional: barndoor 1 set; transparent water proof
panel+seal+screwsx8

