


LS 150 Tree

Model: PR-6821


RoHS | CE | LED | 1.5m | IP65 | T_c:150°C | T_a:40°C | 

LS 150 Tree is a high temperature resistant and high-brightness luminaire, equipped with a 150W LED lamp. It features one color wheel and one individual rotating tree effect wheel, combined with 55 ° light angle, super-fast strobe, rating IP65, etc. It's widely applied in urban buildings lighting, landscape lighting and other multi- scale of locations.

IP65, Tree Effect 



Scan with your Phone
to view more detail

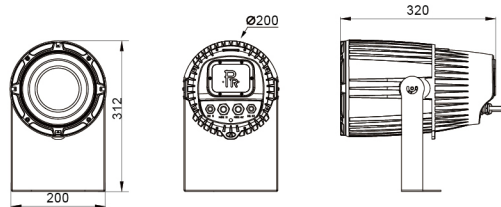

7.5Kg 
Size(mm)

Architectural Lighting

Specifications

- **Input Voltages**
100V~240V AC,50/60Hz
- **Power Consumption**
160W@230V
- **Light Source**
150W LED white(7,500k), 50,000 hrs
- **Strobe**
Electronic strobe, 0-25 F.P.S(preset pulse strobe effect)
- **Dimmer**
0-100% linear adjustment
- **Colors**
1 Color wheel: 5 dichroic color filters plus open
Continual rotation, magnet sensor positioning
- **Gobos**
1 Glass gobo
- **Effect**
1 Metal effect wheel, independently and bi-directionally continually rotating
- **Light Angle**
Beam angle: 55°(optional: 30°)
- **Control**
International DMX512, 3 pins(optional 5 pins) interface
Master-slave synchronized mode, stand-alone mode, preset mode, test mode, and single scene mode
DMX mode, preset memories and user memory mode
- **Other Functions**
LCD panel
Over temperature protection
Fast and convenient software upgrade via DMX512 interface
Built in NTC temperature detecting function, If LED lamp is over heat, its power will be decreased intelligently

- **Physical**
Housing: high-intensity die-casting aluminum, IP65
Ambient working temperature: -20°C~40°C
- **Weight**
Net weight: 7.5kg
- **Packaging**
Standard: carton 585x345x310(mm)
Optional: flight case
- **Accessories**
C clamp, 1 pc
Signal adapter cord, 2 pcs
Power cord, 1 pc
Safety cord, 1 pc
Optional: transparent cover+ seal+ screws x6, 1set

