

TANGO 100 BEAM

Model: PR-6801


CE | LED | $\approx 10\text{m}$ | IP65 | $T_c 55^\circ\text{C}$ | $T_a 40^\circ\text{C}$ | 

Tango 100 Beam is a highly performing beam light using 80W LED with ingress protection up to IP66 for indoor and outdoor applications. Its narrowest beam is 2 degrees and luminous flux 73000lum@5m. It has 1 color wheel, 5-facet prism and other effects. With the highly performing optical system, it has rotating solid beams with multiple colors and sub-beams.

TANGO 100 BEAM 



Scan with your Phone
to view more detail

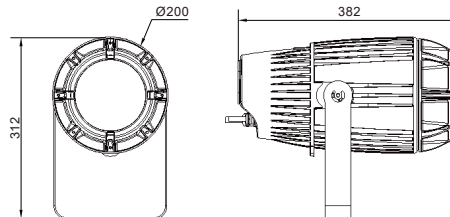

9Kg 
Size(mm)

Specifications

- Input voltage
100V~240V AC, 50/60Hz
- Input power
100W @ 230V
- Light Source
LED lamp White(80W,6200K), 20000hours
- Colors
1 color wheel :7 colors+ white
Bi-direction rainbow effect with variable speeds
Stepping/linear color changing
- Dimmer
Linear Dimmer from 0-100%
- Focus
DMX linear focusing
- Strobe
Electronic Strobe 0-25FP.S. with preset strobe pulse effect
- Beam angle
Beam angle :2.0°
- Control
International standard DMX512 signal control protocol and 5 pin interfaces
Standard mode 8 channels
- Housing
Cast Aluminum , high temperature/anti-UV ABS, IP65
- Net weight
9.0Kg
- Operation temperature
Maximum ambient temperature 40 °C

